

Eco-dec® Concrete & Solid Floor Fitting Instructions



Locate Eco-dec® in the corner to which it is going to be finally positioned and mark lines around the outer edge.




Excavate the floor within the marked area to a sufficient depth of 24mm to accept Eco-dec®
NB: Eco-dec 900x900 will only need excavating 22mm



Ensure Eco-dec® fits neatly into the recess.
Mark shower trap position.




Remove Eco-dec®. Decide upon the position of the waste pipe knocking out a hole in the adjacent wall if required. It will be necessary to remove an area to sufficient depth under the outlet position to accommodate the shower trap. (Approximate trap depth 95mm x 110mm wide). Ensure the trap is fully supported underneath with a weak sand and cement mix.

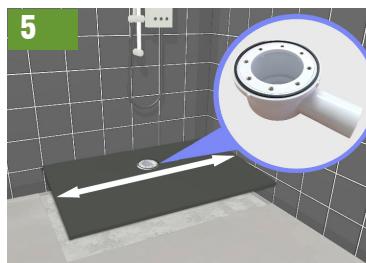

Place trap body into Eco-dec® and ensure that the top surface of the trap flange will finish flush with, or just below, the floor surface on which the sheet flooring is to be laid.

(If you are using a pump, the fitting of the shallower pumped trap is the same).

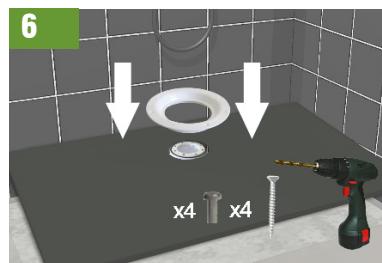

Attach flange to the trap body using the 4 bolts provided, ensuring that the rubber seal is in place. Secure flange to Eco-dec®, there are 4 off countersunk indentations in the flange to assist with this.

Connect trap to waste pipe for outflow drain.



Apply a 'weak' sand and cement mix to the proposed area. This will ensure Eco-dec® is fully supported.

Caution! Ensure the void around the trap body is also filled. **DO NOT** rely solely on support from under the flange



Carefully place Eco-dec® into its position. Checking levels in both directions, gently press Eco-dec® down until level seating is achieved. Evenly apply a heavy weight across Eco-decs® top surface and leave to set.




Use the screws provided to secure the Eco-dec® to the floor. Ensure Eco-dec® is secured along all 4 edges to eliminate any movement. Use extra screws if required.

TIP: Fill the joint, using a resin car body filler or similar to form a strong bond between the Eco-dec® and the floor.



At this stage you will now be ready to bond into position the relevant covings and floor coverings.

NOTE: Bond vinyl sheet flooring to the floor using a 2 part water resistant adhesive. All flooring should be installed in accordance with the manufacturers guidelines.

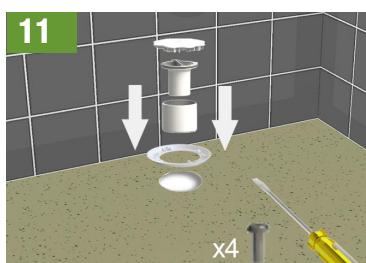

Once the floor covering is laid, screw into position the trap clamping ring using the bolts provided, ensuring the inner cup and dip tube can still be removed.

Fit the shower traps push on cover plate.

You can now install your chosen shower enclosure.

Technical Helpline:
0800 292 2110

NOTE:

If fitting a pumped trap follow the above instructions with the exception of installation of the trap itself, Point 5 & 6.

The trap is a one part trap fed through from the top of the Eco-dec®.